




SPECIFICATION

Material	: Carbon Steel, 304 SS, 316L SS,
Internal Finishing	: Rubber Lining, Epoxy Coated, Sand Blast Finish, Mirror Polished
External Finishing	: Paint Coated, Sand Blast Finish, Mirror Polished
Housing Thickness	: From 1.5 mm to 10 mm or more
Inlet / Outlet	: From 1" to 12" or more
Connection Type	: Threaded, Flange or others
Standard	: BS, JIS, DIN, ANSI or others
For	: Sand, Carbon, Resin or others
Diameter (A)	: 160, 219, 250, 300, 350, 400, 450, 500, 550,
Available (mm)	: 600, 650, 700, 750, 800, 850, 900, 1000, 1100, 1200 or other special made diameter
Height (C)	: Any height from 600 mm to 3 meter
Available (mm)	: or others
Hand Hole size	: From 2" to 12 or other sizes
Manhole	: From 500 mm to 900 mm or other sizes
Vent	: From 1/2" to 2" or more
Drain	: From 1/2" to 4" or more
Sight Glass	: One or more
Nozzles	: With or without nozzles
Nozzle Material	: PP, SS 304, SS 316L
Bottom Plate	: With or without bottom plate
Operating Pressure	: From 7 bar to 10 bar or more
Operating Temperature	: From ambient to 200°C

350

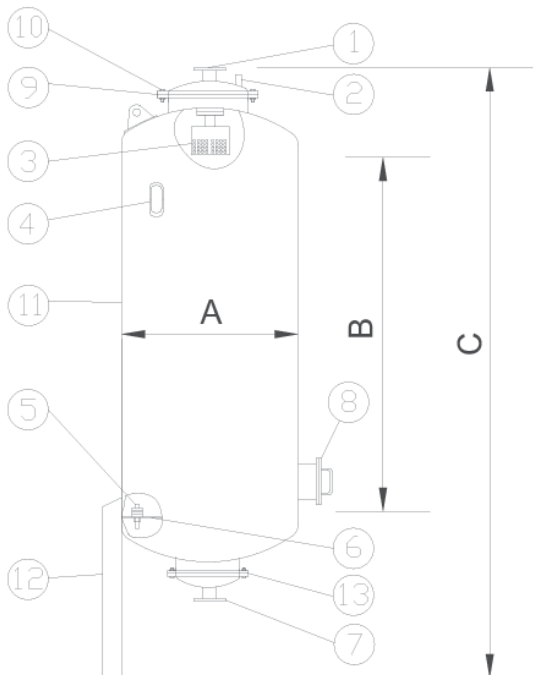

PARTS LIST

No. Description

- 1 Inlet
- 2 Vent
- 3 Strainer
- 4 Side Glass
- 5 Nozzle
- 6 Bottom Plate
- 7 Outlet
- 8 Drain
- 9 Manhole
- 10 Bolt & Nut
- 11 Body
- 12 Leg
- 13 Bottom Hole